

# Cyclonic Debris Removal



## Stop Cleaning Your Machine Tool Tank, Start Making More Money



See Video

### Uninterrupted Tank Cleaning

**Target:** High volume, multiple shifts. Machines with filtering conveyors cutting cast iron or aluminum.

### Key Features

- 80 GPM flow rate
- Filtration down to 3  $\mu$ m
- Cleanable pre-filter
- No disposable filters
- Low maintenance
- 2 year parts warranty

### Benefits

- Clean coolant lasts significantly longer
- Greatly extend tank clean outs
- Less wear & tear on machine
- Overall cleaner machining environment
- Improved part quality
- Improved tool life



Adding just 1 quart of debris a day to your tank may not seem like much, but it accumulates over time. **One quart of debris a day is equal to:**



**45 gallons** of sludge  
in your tank over **6 months**




**90 gallons** of sludge in your tank over 1 year

# Increase time between tank cleanouts by 5-10X!



This means planning in years instead of months!

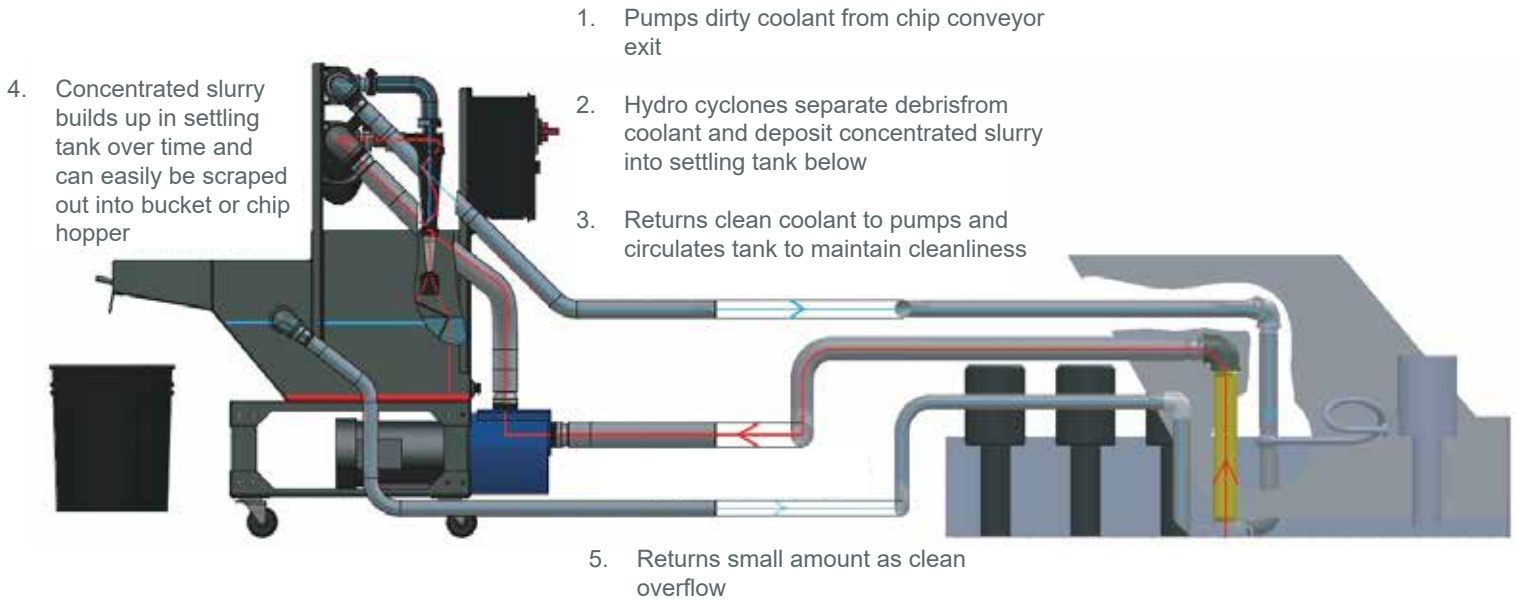

## Specs - CDR Filtration System

Fluid Control	3 HP Pump
Filtration	D50 of 8 um
Power	208-230VAC
Flow Rate	80GPM
FLA	9 Amps
Weight (lbs)	500 lbs
Coolant Type	Water Based
*480V Option	4 Amps FLA

